

Prime Ratings Range		
Genset Model	KDG0320P1	KDG0380P1
Frequency	50Hz	50Hz
kVA	320	380



The Kohler Advantage

- One-stop solution for the generating system and accessories
- Manufactured in India with global expertise
- Compact design with ease of maintenance
- Excellent motor starting capability
- Best in class block loading capacity
- Flexible & creative customized solutions to meet customer needs
- Fast response time
- Two-years or 3000 hours as per standard warranty terms from date of initial startup

Special Features

- Full authority electronic engine with superior energy efficiency and fuel economy
- Integral vibration isolation eliminates the need for under-unit vibration spring isolators
- Advanced Digital Controller (ADC) with 3 auto crank cycles and inbuilt AMF logic
- Alternator features:
 - Alternator meets Indian and relevant section of other international standards
 - Self-ventilated and dripproof of IP23 construction
 - Superior voltage waveform by 2/3 pitch wound stator
 - Sustained short circuit current of up to 300% of the rated current

Standard Features

- Engine coupled, skid mounted alternator
- Single - bearing alternator with insulation Class H
- Unit mounted radiator with 50°C ambient temperature
- Base frame mounted fuel tank with minimum 8 hrs running capacity
- Dry type air filter with restriction indicator
- DG circuit breaker
- Electric start with battery
- Fuel water separator
- Conveniently located fuel level indicator
- Exhaust tail pipe as standard scope of supply
- Weather proof enclosure to withstand harsh climate
- Ease of accessibility for all routine service points
- Four point bottom lifting

Conformance Standards

- ISO 3046
- BS 5514
- ISO 8528
- IS 4722
- IEC 34
- BS 5000 (Part 99)
- IS: 13364 (Part 1&2)

Generator Set Ratings

Genset	Engine	Voltage	Phase	Hz	Prime Rating		Amps
					kWe	kVA	
KDG0320P1	TAD1351GE	415	3	50	256	320	445
KDG0380P1	TAD1354GE	415	3	50	304	380	528

PRIME POWER RATINGS: Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1 and BS 5514. For limited running time and base load ratings, consult the factory. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions.

Engine Specifications

Specifications	320 kVA	380 kVA
Engine : model, type	TAD1351GE, TCIC	TAD1354GE, TCIC
No. of cylinders & arrangement	6, Inline	6, Inline
Displacement, L (cu. in.)	12.78 (779.70)	12.78 (779.70)
Bore and stroke, mm (in.)	131 x 158 (5.16 x 6.22)	131 x 158 (5.16 x 6.22)
Compression ratio	18.1:1	18.1:1
Governor type	EMS 2.2	EMS 2.2
Governor Class	Class A1	Class A1
Frequency regulation, steady state	ISO 8528 G3	ISO 8528 G3
Air cleaner type, Qty	Dry, 1	Dry, 1
Unit-mounted radiator ambient temperature °C (°F)	50 (122)	50 (122)
Max. power kWm (BHP) @ rated speed (rpm)	286 (383.4) @ 1500	339 (454.4) @ 1500
Diesel Fuel Consumption		
100% Load (Lph)	65.6	75.6
75% Load (Lph)	50.2	59.0
Lube Oil Consumption		
100% load (Lph)	0.04	0.04
Fuel System		
Fuel priming	Manual	Manual
Fuel filter : Type, Qty	Primary / Secondary, 2	Primary / Secondary, 2
Recommended fuel	HSD-ASTM D2	HSD-ASTM D2
Fuel tank capacity, L	660	660
Fuel filter change period	Initial - 100 hrs / 3 months, Subsequent 500 hrs / 12 months, whichever is earlier	Initial - 100 hrs / 3 months, Subsequent 500 hrs / 12 months, whichever is earlier
Lubrication System		
System type	Forced Lubrication	Forced Lubrication
Lube oil type	Kohler Oil	Kohler Oil
Oil pan capacity with filter, L	36	36
Oil filter: Quantity, Type	3, Cartridge	3, Cartridge
Oil and oil filter change period	Initial - 100 hrs / 3 months, Subsequent 500 hrs / 12 months, whichever is earlier	Initial - 100 hrs / 3 months, Subsequent 500 hrs / 12 months, whichever is earlier
Exhaust System		
Maximum allowable back pressure, KPa (in.Hg)	10 (2.95)	10 (2.95)
Exhaust outlet size at engine hookup, mm (in)	98.5 (3.88)	98.5 (3.88)
Silencer Type, Quantity	Residential, 1	Residential, 1
Exhaust temperature at rated kW, dry exhaust, °C (°F)	467 (873)	470 (878)
Cooling System		
Ambient temperature, °C (°F)	50 (122)	50 (122)
Coolant capacity including engine, L (gal)	24 (6.33)	24 (6.33)
Water pump type	Centrifugal	Centrifugal
Fan diameter, including blades, mm (in.)	890 (35)	890 (35)
Engine Electrical System		
Starter Motor rated voltage VDC	24 V	24 V
Battery charging alternator	24 V, 80 Amp	24 V, 80 Amp
Ground (negative/positive)	Negative	Negative
Battery type-	Flooded type, Maintenance free	Flooded type, Maintenance free
Battery rating (Amp-hour)	90	90
Quantity	2	2
Battery voltage, VDC	24	24

Alternator Specifications

Specifications	320 kVA	380 kVA
Type	4 Pole	4 Pole
Exciter type	Brushless	Brushless
Voltage regulator	AVR	AVR
Insulation - Material - Temperature rise, Prime	Class H 125°C	Class H 125°C
Bearing: Quantity, Type	1, Sealed	1, Sealed
Coupling	Close coupled	Close coupled
Voltage regulation	+/-1%	+/-1%
Excitation	Self excitation	Self excitation
Frequency, Fixed, Hz	50	50
Full load current - 3 Phase	445	528
Prime at 125° C, kVA	320	380

Advanced Digital Controller (ADC3503)

Standard Features

- Master switch: Control On/Off
- Event Log
- Remote two-wire start/stop capability
- One-source responsibility for generating system & accessories
- Automatic start with programmed cranking cycle
- Field software upgrade possibility
- Operating temperature: -30°C to 70°C (-22°F to 158°F)
- Storage temperature: -40°C to 85°C (-40°F to 185°F)
- Humidity: 0-95% condensing
- Control Panel
 - Alternator to breaker panel connection with copper cable only
 - MCCB/MCB details: 3 Ph - with short circuit and overload protection
 - Inbuilt AMF controller
 - Output Aluminium cable size : (Sq.mm x run) : 3.5 core :

Up to 200 meter cable length	320 kVA	380 kVA
Output Aluminium cable size: (Sq. mm)	400 X 2 runs	500 X 2 runs



Optional Features

- Microprocessor based AMF change over panel
- Synchronizing controller
- Remote monitoring system
- Customized Synchronizing panel

Controller Information


LCD Display	LCD Display Faults	Display Warnings	Optional Accessories	Power Requirements
Runtime hours	High engine temperature	Low battery voltage	Battery charger	8 V to 35 V continuous
Engine speed	Low oil pressure	High battery voltage	Mains sensing relay inbuilt	100 mA @ 12 VDC
Power factor KVAR	Overspeed / Underspeed	Low fuel level	Earth leakage protection	105 mA @ 24 VDC
Current	Over and under voltage	Maintenance Alarm (water in fuel)	VAF meter (Multifunction)	
Voltage	Over and under frequency	High engine temperature	kW-hr display	
Frequency	Emergency stop	Maintenance warning		
Engine temperature	Auxiliary fault			
Engine oil pressure	Low fuel level			
Battery voltage	Over load current			
Kilowatt & kVA	Phase reversal			
Fuel level				

Regulatory Compliance

Specifications	320 kVA	380 kVA
As per ISO 8178-5 mode cycle (Engine emission)	CPCB-II compliant	CPCB-II compliant
Noise level measured at 1 meter distance	< 75 dB (A)	< 75 dB (A)

Dimensions and weight

Specifications	320 kVA	380 kVA
Overall Size, L x W x H (mm)	5060 x 1640 x 2493	5060 x 1640 x 2493
Overall Size with silencer, L x W x HT (mm)	5060 x 1640 x 2918	5060 x 1640 x 2918
Dry weight, max (kg)	4900	5000

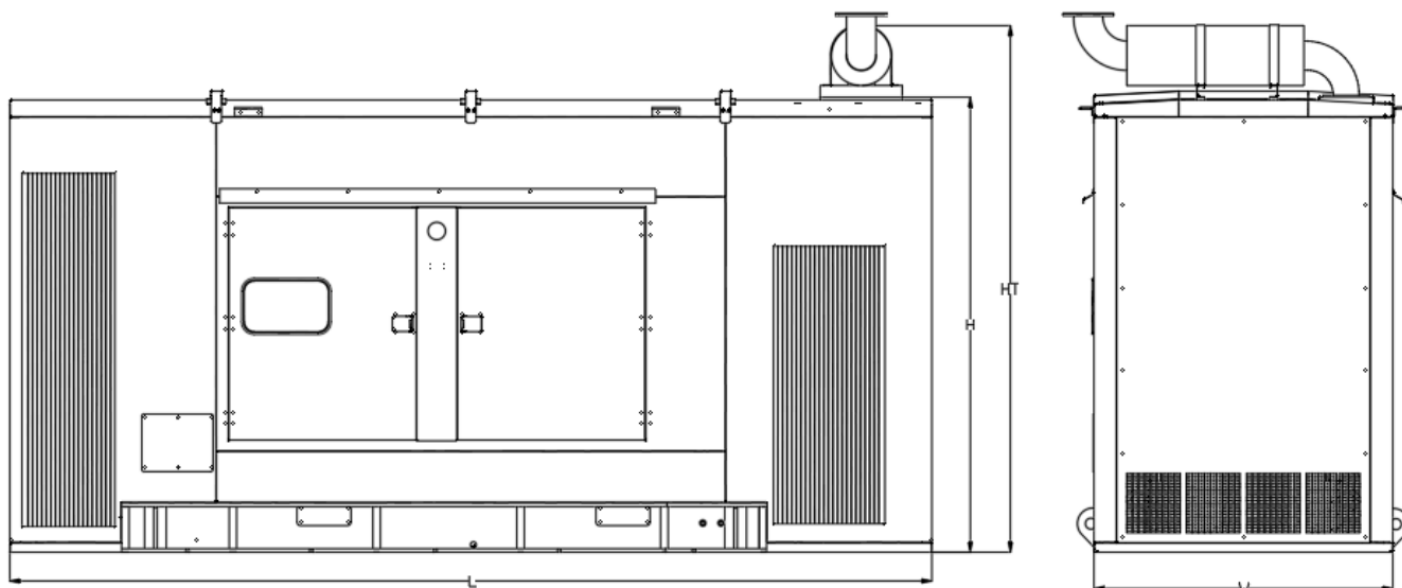

NOTE : Drawing provided is for reference only and should not be used for planning installation. Please contact the Company for latest updated details.

* Disclaimer: Product images shown are for illustration purpose and may not be an exact representation of product.

* All the data is as per respective manufacturers' specification. Please refer O & M manual for maintenance and preservation guidelines.

* Fuel consumption data is based on HS Diesel having specific gravity of 0.85 and conforming to IS:1460 Standard. Fuel consumption tolerance is +5%.

KOHLER reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

KOHLER
IN POWER. SINCE 1920.

Corporate Office :
Kohler Power India Pvt. Ltd.,
701 & 702, 7th Floor, Pentagon Tower P5,
Magarpatta City, Hadapsar, Pune - 411013,
Maharashtra, India.

Regional Offices :
Pune : +91 20 6649 7101 | New Delhi : +91 11 4102 2919
Kolkata : +91 33 4063 3512 | Bangalore : +91 80 4286 7000

Factory :
Kohler Power India Pvt. Ltd.,
(Formerly: Lombardini India Pvt. Ltd.),
J-2/1, MIDC Chikalthana, CIDCO,
Aurangabad - 431210, Maharashtra, India.

Authorised Channel Partner:

ISO 9001
KOHLER
IN POWER. SINCE 1920.
NATIONALLY REGISTERED

Printed in India

© 2021 by Kohler Co.

All rights reserved. Use of this material is strictly prohibited
without written permission from Kohler Co.

kohlerpower.in / 1800 266 0600 / kpi.info@kohler.com / +91 95 2777 7779